

7.6

()

7.7

« ».

8

9

48

36

10

70 %

— 4

40

50 °

:

«

»

,

-

,

.. .27

!



-7108

“

”

1

1.1 -7108 , ,


1.2 -7108 220 50 .

1.3

1.4 (EAC),

1.5 II

1.6 60598-1-2011. 2 15150-69, 2000 . -7108



2

- 175...265 , 50 — 8 0,4 — 950 — 800 — (5 ± 2) — IP65 : -40 +40 ° UL94 — v2 — 45 000 x x — 160 x 100 x 35

3



-7108 — 1 . — 1 . — 1 .

4

-7108 , 1. , () ; () ; ()

),

(«E» () . 2 , «E») («L», 2 ,)

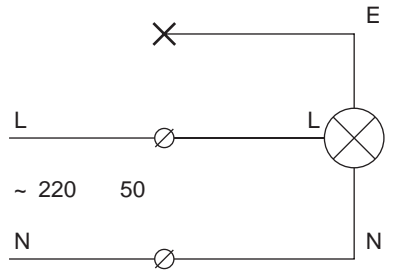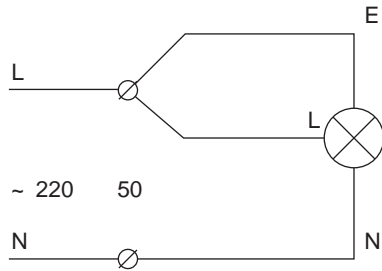

) (2 —) (-7108)

5

5.1 220 50 .

5.2

5.3 40 ° .

6

6.1

6.2

7

7.1 () .

7.2

7.3

7.4 2. ,

7.5