

6

6.1

6.2

7

7.1 ()

7.2

7.3

7.4

2 3.

7.5

(.3).

8

9

48 36

10

70 % —4 40 50 °

: « » , .27,

! ,

.1



-7115E

“ ”



1

1.1 -7115E


1.2 220 50

1.3

1.4 (EAC),

1.5 II

1.6 60598-1-2011.
1 15150-69,
2000 . 1 - -7115



2

- 175...265 , 50
- 13
- < 3
- 1920
- 1620
-
(cos) - > 0,85
- IP66
: -40 +40 °
UL94 - v2

3

-7115 - 1 .
- 1 .
- 1 .
- 2 .
- 1 .
- 1 .

4

-7115

1.

() , ()


«E» («L»)

«E»


) 2 . ()

) 2 . ()

) 2 . ()

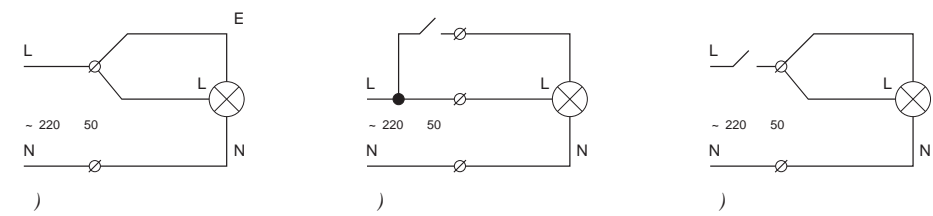

2 - -7115

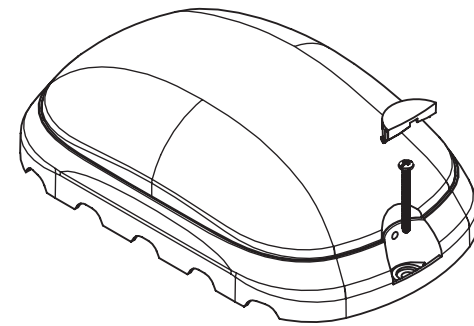

3 -

5

5.1 220 50

5.2

5.3 40 °