

7.6

3.

7.7

( )

4


5 8

7.8

7.9


7.10

« ».

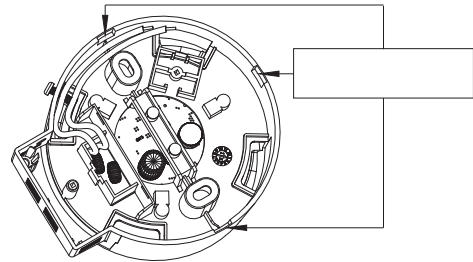


3 —

4.



2 —

-26

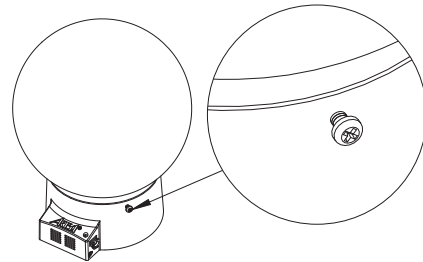

4 —



-26

«

»

8

9

24

12

10

70 %

— 2

40

50 °

:

«

»


.. .27

!

.1

1

1.1  
 1.2 220 50  
 1.3  
 1.4  
 (EAC),  
 II  
 1.5  
 60598-1-2011.  
 1.6 15150-69,  
 2000 I - -26

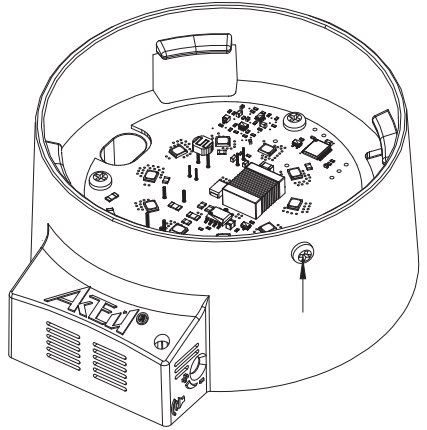

2

— 175...265 , 50  
 — 6  
 — < 0,4  
 — 670  
 — (52 ± 5)  
 — (5 ± 2)  
 — (60 ± 10) ( )  
 ) — IP20  
 : -30 +40 °  
 UL94 — V2  
 x x — 105,2 x 95 x 46,6  
 — 45 000

3

-26 — 1  
 — 1  
 — 1  
 — 1

4

-26  
 1.

5

5.1 220 50  
 5.2 DL-2DX31.  
 0,5  
 5.3  
 5.4  
 68  
 5.5  
 5.6  
 5.7 30 40 °  
 5.8

6

6.1  
 6.2

7

7.1 5 ( )  
 7.2 ( )  
 7.3  
 7.4  
 7.5 2.